



Additional Anyscene 512 models & external recall of presets

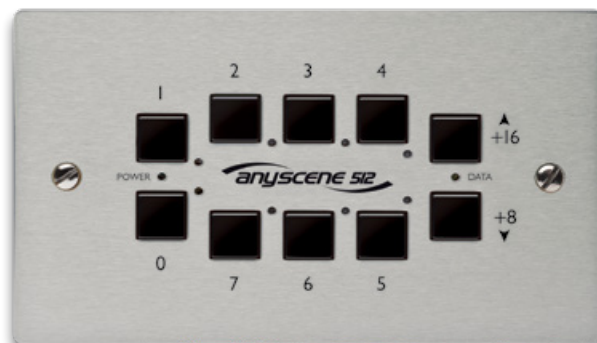

**NEW
PRODUCT**

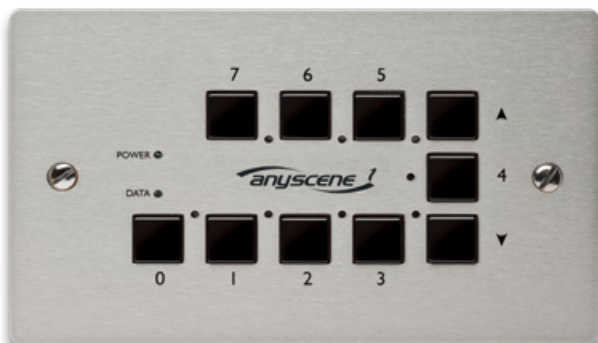

**NEW
PRODUCT**



The Anyscene 1 & 512 are DMX scene recall units capable of controlling any DMX device. The units can be used on their own or in conjunction with any other external DMX controllers / desks.

Anyscene 1

7 presets + blackout DMX scene recall unit, one panel per system.

- Stylish and easy to use wall mounting DMX scene recall unit
- 7 programmable presets plus 'Blackout' with full status indication
- Master level control
- Up to 36 independent channels of DMX control per preset DMX addresses 001 to 036
- Simple to programme from any DMX lighting desk or controller
- Jumper selection of 5 or 10 second fade times
- Standard UK double patress rear box depth 32mm+
- 1x RJ45 category 5 connection provides both data and power
- Automatic DMX backup feature
- Infra red controlled version IR Anyscene

Anyscene 512

Up to 23 presets + blackout DMX scene recall unit, up to 3 panels per system.

- Stylish and easy to use DMX scene recall unit
- 23 programmable scenes plus 'blackout' with full status indication
- 512 independent channels of DMX control / scene
- Master level control
- Simple to programme from any DMX lighting desk or controller
- Selectable fade rate between scenes of 2.5, 5, 10 or 20 seconds
- External recall of up to the first 7 presets and 'blackout' (0) via screw terminals
- Dimmable front panel status LED's
- Standard UK double patress rear box depth 32mm+
- All DMX and power input connections can be supplied as screw terminals instead of 2 x RJ45 sockets, to special order
- 2 x RJ45 category 5 connection provides DMX data and power
- Automatic DMX backup feature

All models available in either Brushed Stainless Steel or Textured White as standard. Special finishes and printing / engraving available to special order.

AS180 Power Supply & DMX Connectors




Designed specifically for Anytronics Anyscenes. Can also be used with OEM lighting control systems

- 2m Mains supply cable
- Mains supply neon indicator
- 2 x RJ45 connectors with +5V supply
- 1 x Male and 1 x Female 5 pin XLR connectors (3 pin XLR's to special order)
- Wall mount flanges
- Robust galvanised steel enclosure
- Dimensions 136(L) x 91(W) x 50(D) inc. flange

Installation with Anytronics dimming pack

Anyscene units can be powered directly from Anytronics dimming / switching packs, interfaces and LED drivers via a standard RJ45 data and power connection. Expansion DMX through connections provided from dimming packs or interfaces via XLR, RJ45 or screw terminals.

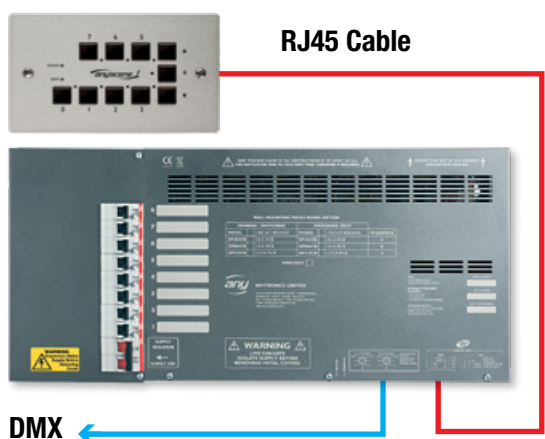

Installation with other DMX equipment

Anyscene units can be connected to other manufacturers DMX equipment via the AS180 interface which requires a 220/240V AC supply.

